Industrial Pumps

WGP SERIES

Epoxy Encapsulated, Direct Drive



Applications

- Ideal for pond filtration and water effects (i.e. waterfall and stream applications found in water gardens)

Features

- 1/8 HP PSC motor (507256, 507265, 507276)
- 5/8 HP PSC motor (507295)
- Unique dual discharge
- Motor sealed in stainless steel housing enclosed in Polypro housing
- Designed for continuous duty
- Polypro housing, cover and volute
- Nitrile shaft seal
- Includes 1-1/4" BSPP x 1" barb elbow (25.4 mm) for 1" I.D. (25.4 mm) tubing
- IP 68
- Two-year warranty

Series Specifications

Capacity: 3420 LPH @ 1 m (507256); 7200 LPH @ 1 m (507265); 9400 LPH @ 1 m (507276); 13630 LPH @ 1 m (507295)

Shut Off: 5.5 m (507256); 6.1 m (507265); 7.6 m (507276); 8.1 m (507295)


Discharge: 1-1/4" FNPT (32 mm)

Electrical: 230V, 50Hz, 1.2A, 270W (507256, 507265); 230V, 50Hz, 3.3A, 700W (507276, 507295)


Model Characteristics

Item #	Model	Volts	Cord	Weight (Kg.)	Bar	List/Cert.
507256	WGP-55	230	10 m	6.57	0.60	CE
507265	WGP-65	230	10 m	4.76	0.61	CE
507276	WGP-75	230	10 m	5.21	0.79	CE
507295	WGP-95	230	10 m	7.03	0.81	CE


Performance Curves WGP-55

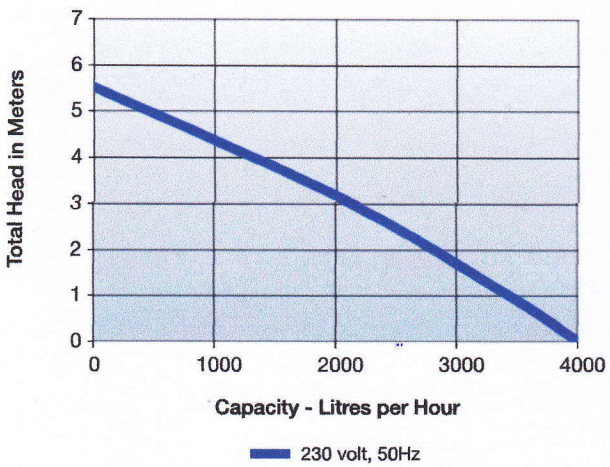

Performance Curves WGP-65

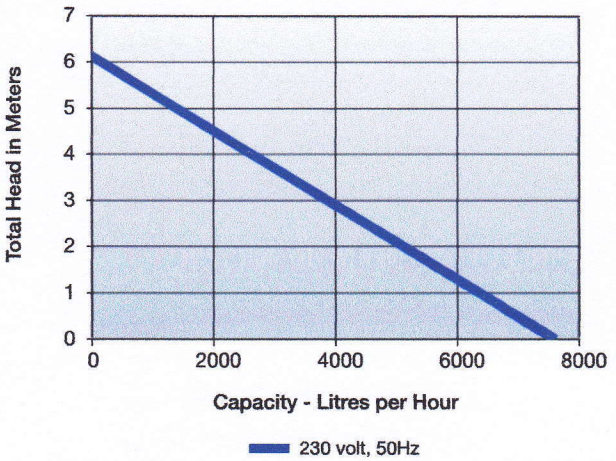

Performance Curves WGP-75

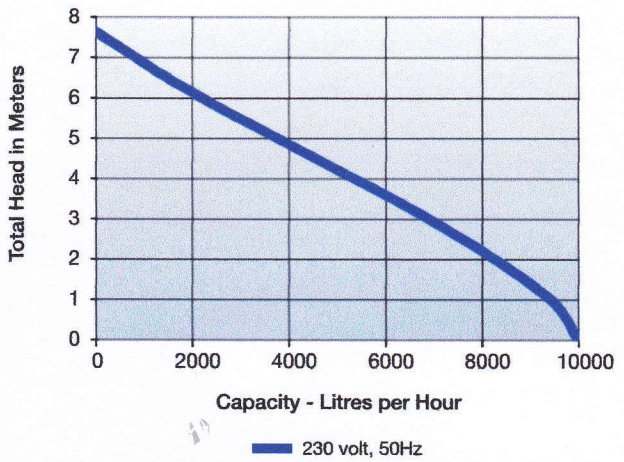

Performance Curves WGP-95

